




*improving your process*

# PCM Equipement

17, rue Ernest Laval - BP35 - 92173 Vanves Cedex France  
 Tél: + 33 (0) 1 41 08 15 15 - Fax: + 33 (0) 1 41 08 15 00  
 Internet: www.pcmpompes.com Email: pcm@pcmpompes.com



FP-PE-AMS-A 02.vsd

## Accessories

## Industrial Stator Security System - AMS



- **Dry running protection with relay output**
- **Presetted threshold at 10cm/s (adjustable)**
- **Easy plug on frequency inverters**
- **Start management**
- **Fault management**


- Pressure connection: **1/2" BSP on suction pipe**
- Protection: **IP67**
- Materials - **Connection: 316Ti stainless steel**  
 - **Housing: plastic**
- Electric connection: **M12 connector**

- Power supply: **24VDC I < 100mA**
- Electric output: **2A / 230VAC or 60VDC**
- Threshold: **Pre-set at 10cm/s and re-adjustable**
- Time range for start and fault management: **0 to 25s**
- Fluid temperature: **-20°C to 80°C**
- Ambient temperature: **-20°C to 70°C**

**M12 connector with cable gland pg9  
 (Sealing range capacities 4 to 8 mm)**  
 Ref C05044Z000

**M12 connector with  
 yellow PVC cable  
 4x0.34mm<sup>2</sup> Ø 5mm**

<b>2m (4x0.34mm<sup>2</sup>)</b>	<b>Ref C05044D010</b>
<b>5m (4x0.34mm<sup>2</sup>)</b>	<b>Ref C05044E010</b>
<b>10m (4x0.34mm<sup>2</sup>)</b>	<b>Ref C05044F010</b>
<b>20m (4x0.34mm<sup>2</sup>)</b>	<b>Ref C05044H010</b>

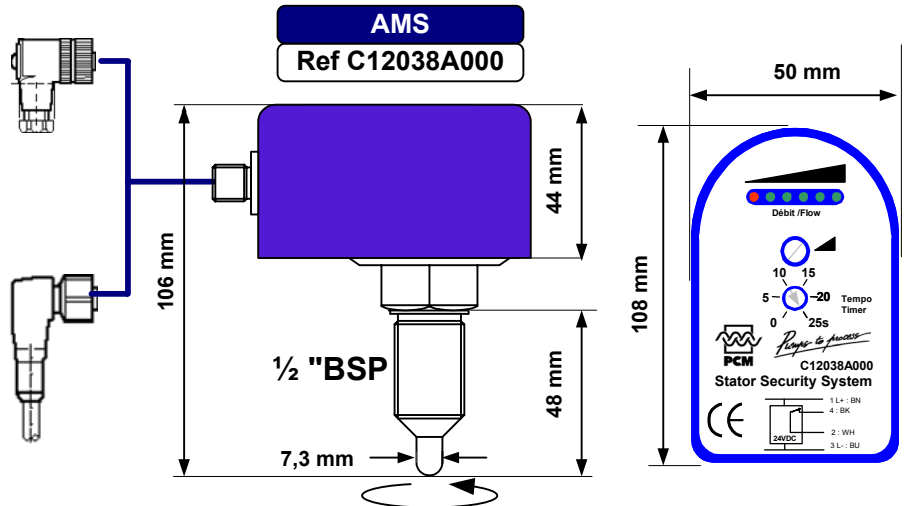

**316L stainless steel  
 adaptator 1/2" BSP to weld**  
 C14034D014

